


NEOREST®

TS991A Shower Tower

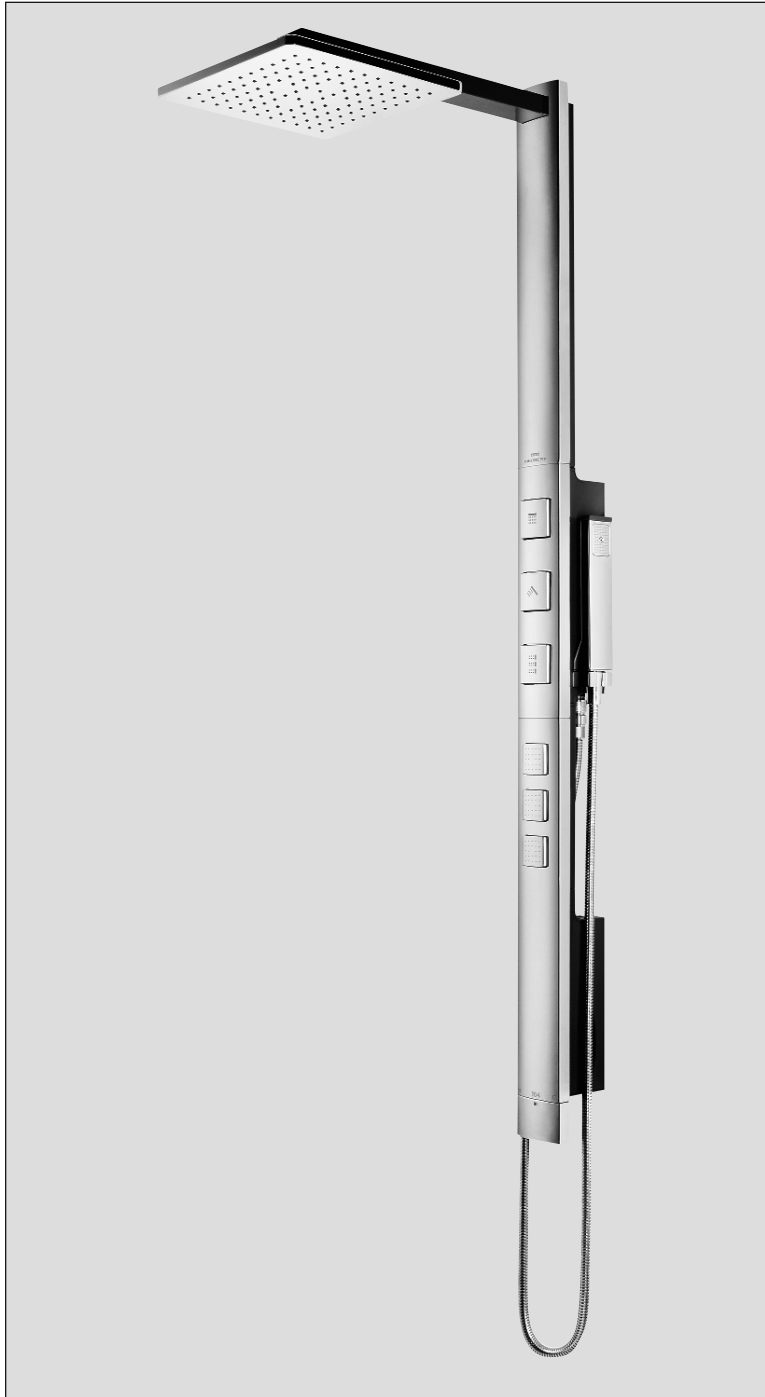

- Push buttons activate operation of showerhead, handshower and 3 body sprays
- Temperature control handle
- Volume control switch
- 71" Handshower hose
- SMA Thermostatic mixing valve

TS991A#CP - Neorest® Shower Tower


TOTO®

TS991A Neorest® Shower Tower

■ SPECIFICATIONS

Product:	TS991A#CP
Materials:	Cast Brass
Hot/Cold-water supply:	Minimum required water pressure: 21PSI (140kPa) (when flowing) Maximum water pressure: 125PSI (862 kPa)
Water supply connection:	1/2" NPSM
Functions:	3 Push Buttons for each operation of showerhead, handshower and 3 body sprays. Temperature control handle Volume control switch
Discharge Quantity:	2.5 GPM (9.5 l/min) Showerhead 2.5 GPM (9.5 l/min) Handshower 0.83GPM (3.17 l/min) Each bodyspray
Discharge water temperature control range :	33°-104° F (1°- 40° C) (Max) (When used under standard conditions)
Anti-scald safety feature:	Provides the user protection against exposure to excessive water or outlet temperature fluctuation resulting from normal variation in inlet water pressure.
Shipping Weight (each):	65 lbs.
Shipping Dimensions (each):	L x W x H (57" x 25" x 7.5")
Warranty:	Lifetime Limited Warranty (Residential use), One Year (Commercial Use)
Listing / Approvals:	IAPMO c-UPC, and other municipalities
Codes and Standards:	ASME A112.18.1, CSA B125.1-2005, ASSE 1016

These dimensions and specifications are subject to change without notice.

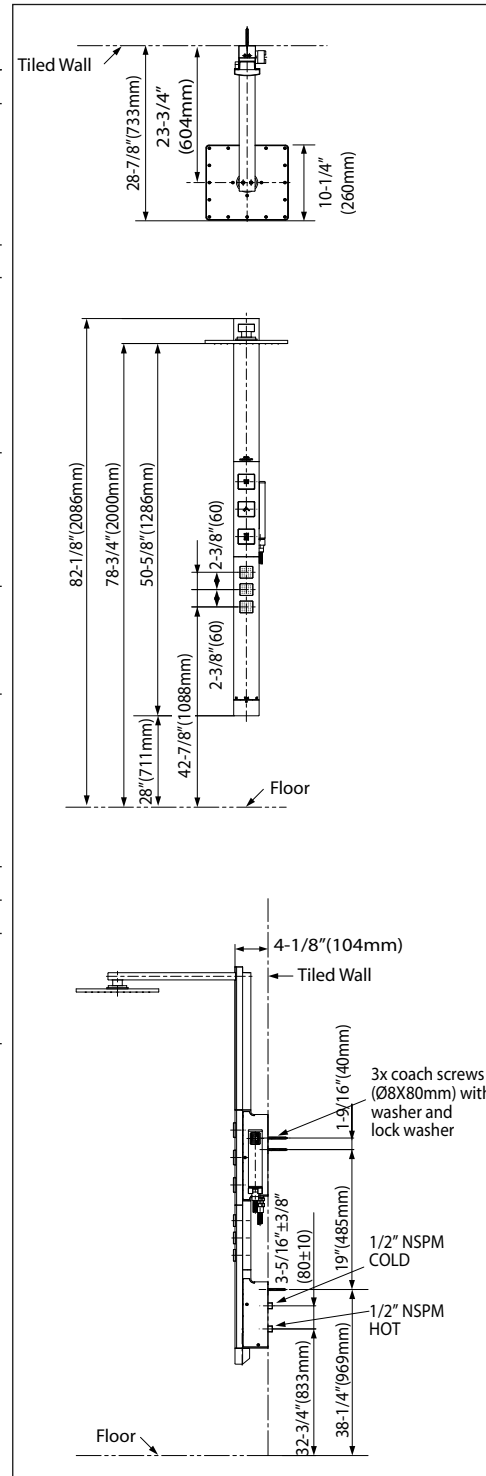

TS991A#CP - Neorest® Shower Tower

TOTO®

TOTO® U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
Tel. (888) 295-8134 • Fax. (800) 699-4889 • www.totousa.com

Printed in U.S.A. © TOTO® LTD. 03/07 #J10172

Printed on recycled paper ♻️