



CST733F - Dalton Close Coupled Toilet with SS114 - SoftClose Seat



ST733

- Clean lines with convenient tank lid shelf
- Ultra low 1.6 Gpf flush
- Universal Height 16 1/8" rim height
- Siphon Jet Gravity flushing system
- Large water surface
- Wide, 2-1/8" computer designed trapway

High profile ADA compliant close coupled toilet with 12" rough-in. Low consumption (6 Lpf/1.6 Gpf) siphon jet flushing action.

Tank cover, fittings, chrome plated trip lever, less seat.

■ **CST733F**

Round, less seat. 12" rough-in.

□ **C733F**

Round front bowl only, 12" rough-in.

□ **ST733**

Tank and cover only. Complete with tank trim & coupling components.

□ **SS114**

Round closed front toilet seat and cover with SoftClose hinge system. Mounting hardware included.

Colors:

Standard #01 Cotton, #11 Colonial White
#12 Sedona Beige, #03 Bone
#51 Ebony

Trip Lever:

Standard Chrome Plated
Optional See price book for additional finishes



ADA Compliant

For installation condition with approach from the left hand side.

CST733F

Close Coupled Toilet, 1.6 GPF

■ PERFORMANCE

The TOTO 1.6 GPF toilet scored the highest possible rating in independent laboratory performance tests. With a powerful and quiet flush design, the toilet also offers a large water surface.

■ SPECIFICATIONS

Water Use: 1.6 Gpf / 6.0 Lpf
 Flush System: Siphon Jet Gravity flushing system
 Min. Water Pressure: 8 psi
 Water Surface: 9-3/8" x 8"
 Trap Diameter: 2-1/8"
 Rough-in: 12"
 Trap Seal: 2-1/8"
 Warranty: One Year Limited Warranty
 Material: Tank & Bowl: Vitreous china

Shipping Weight: **C733F** 51 lbs.
ST733 40 lbs.

Shipping Dimensions: **C733F** 27-1/8"L x 9-5/8"W¹
 x 15-5/8"W²
 x 16-3/4"H
ST733 21-1/4"L x 8-1/4"W¹
 x 17-1/8"H


Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CAN/CSA B 45 requirements.

Listing / Approvals: IAPMO/UPC, CSA, City of Los Angeles, State of Massachusetts, and others



Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of rim is 17"- 19" from the finished floor. For installation condition with approach from the left hand side.

These dimensions and specifications are subject to change without notice.

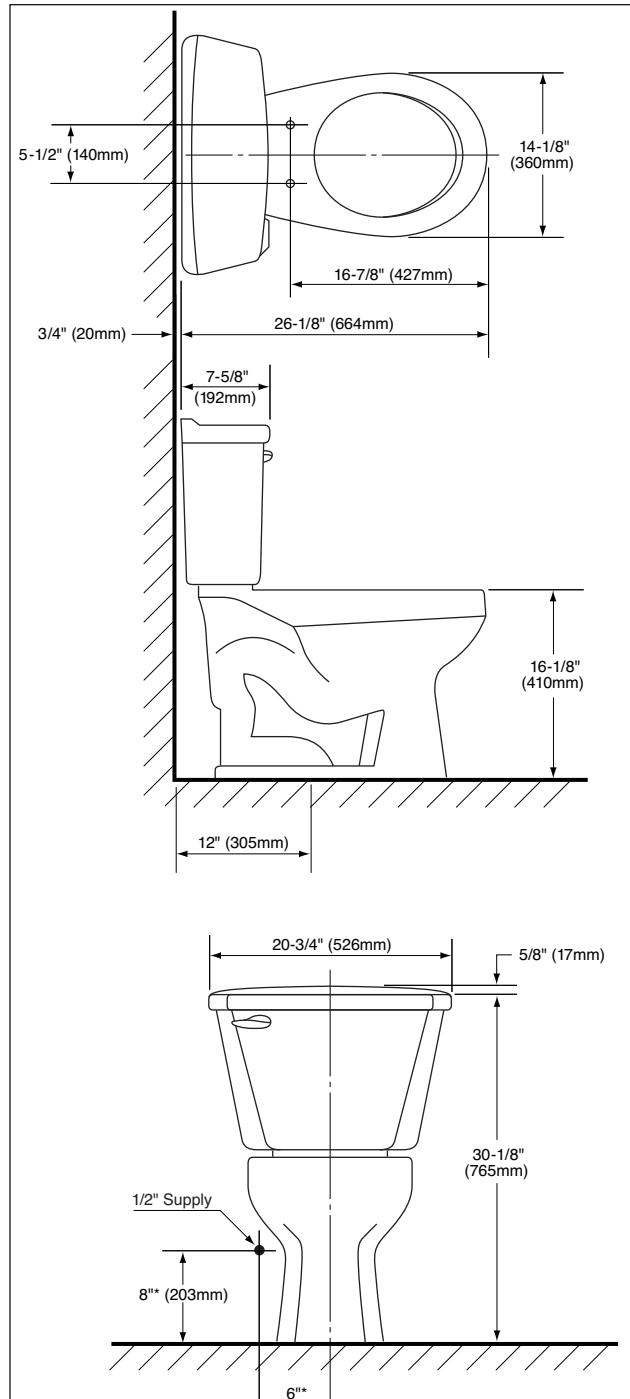

CST733F -Close Coupled Toilet

TOTO®

TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
 Tel. (888) 295-8134 • Fax. (770) 282-8701 • www.totousa.com
 Printed in U.S.A. © TOTO LTD. 02/03 #A10125A

Printed on recycled paper

REV 02/09