

TOTO®

CST744S(G) Drake Close Coupled Toilet, 1.6 GPF




CST744S(G) - Drake Close Coupled Toilet with SS114 - SoftClose Seat



G-Max Technology: Quiet, powerful, commercial grade flushing performance.



Choose a SoftClose toilet seat, or upgrade to a Washlet.

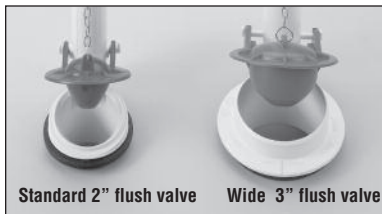

Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.



SanaGloss® glaze seals the surface, creating a finish that actually repels stains caused by buildup of mineral deposits.

Colors:
Standard #01 Cotton, #11 Colonial White
#12 Sedona Beige, #03 Bone
#51 Ebony

Trip Lever:
Standard #CP Chrome Plated
Optional See price book for additional finishes

- Contemporary, high profile design
- G-Max Technology
- Powerful, quiet flush every time
- Wide, 2-1/8" computer designed trapway
- Large water surface
- SanaGloss Technology: super smooth, ion barrier glazing for a clean toilet bowl

High profile close coupled toilet. Low consumption (6 Lpf/1.6 Gpf) siphon jet flushing action.

Tank cover, fittings, chrome plated trip lever, less seat.

■ **CST744S(G)**

Elongated, 12" rough-in, less seat.

□ **C744E**

Elongated bowl only, 12" rough-in.

□ **C744EG**

Elongated bowl only, 12" rough-in. SanaGloss Glazing. Available Colors: #01

□ **ST743S**

Drake tank and cover only. Complete with tank trim and coupling components.

□ **SS114**

SoftClose: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

□ **SC134**

Elongated, open front seat with lid.

□ **SC534**

Elongated, open front seat less lid.

TOTO USA, Inc. recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

CST744S(G)

Drake Close Coupled Toilet, 1.6 GPF

■ PERFORMANCE

The TOTO G-Max low consumption toilets received high ratings during ANSI/ASME and CSA testing at independent laboratories. Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trapway.

■ SPECIFICATIONS

Water Use: 1.6 Gpf / 6.0 Lpf
 Flush System: Gravity Feed (G-Max System)
 Min. Water Pressure: 8 psi
 Water Surface: 10-1/4" x 8-1/2"
 Trap Diameter: 2-1/8"
 Rough-in: 12" rough-in
 Trap Seal: 2-1/2"
 Warranty: One Year Limited Warranty
 Material: Vitreous china

Shipping Weight: **C744E(G)** 52 lbs.
ST743S 35 lbs.


Shipping Dimensions: **C744E(G)**
 27-3/4"L x 15"W¹
 x 11-3/8"W² x 15-1/8"H

ST743S 20-1/8"L x 8-1/4"W
 x 15-1/2"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CAN/CSA B 45 requirements.

Listing and approval: IAPMO/UPC, CSA, City of Los Angeles, State of MA, and others

These dimensions and specifications are subject to change without notice.

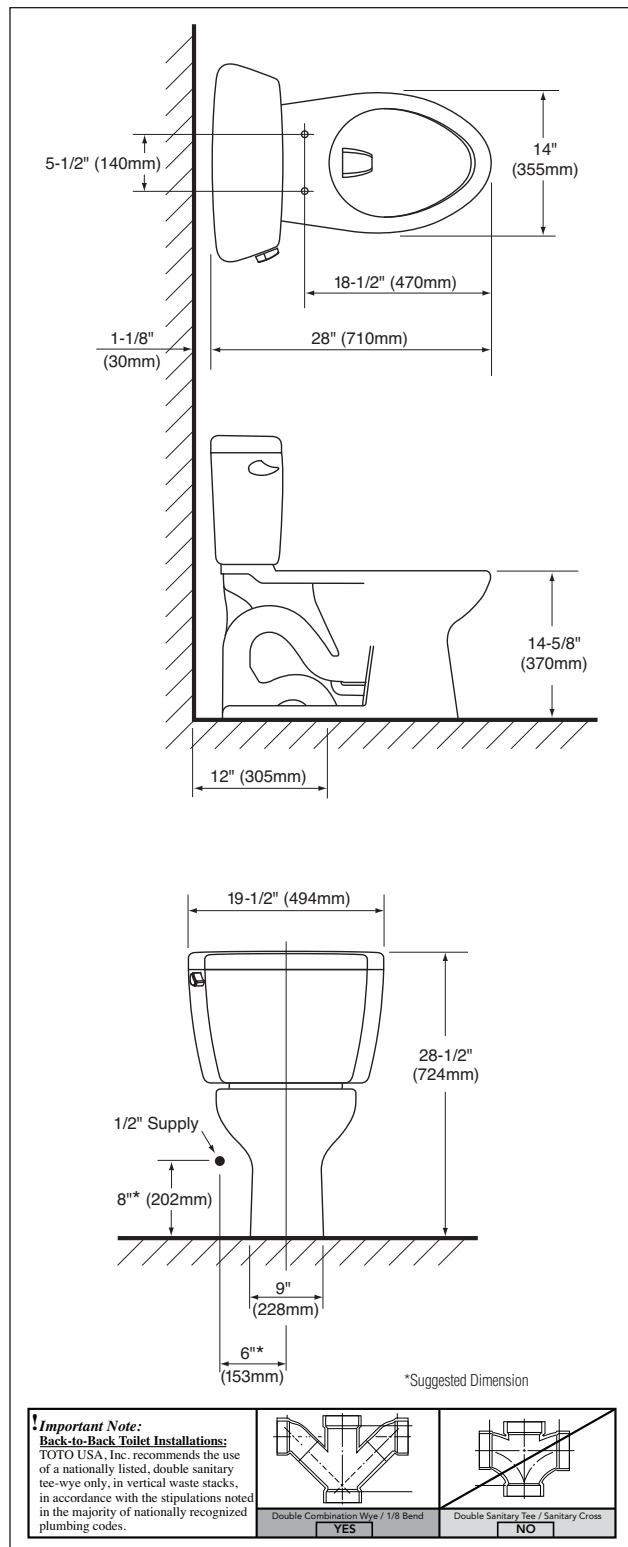

CST744S(G) - Drake Close Coupled Toilet

TOTO®

TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
 Tel. (888) 295-8134 • Fax. (800) 699-4889 • www.totousa.com
 Printed in U.S.A. © TOTO LTD. 9/03 #A10110

Printed on recycled paper ♻️

REV 03/09