

# TOTO®

Perfection by Design

## Manual Water Closet Flushometer Valve Exposed – 1.6 GPF & 3.5 GPF

To be specified:

**Toilet Flush Valve**

Valve Only

■ 1.6 GPF - TMT1HNC

■ 3.5 GPF - TMW1HNC

Complete Set

■ 1.6 GPF - TMT1HNC-32

■ 3.5 GPF - TMW1HNC-32

Complete Set Supplied With:

Vacuum Breaker & Angle Stop Set - VB9CP-32

■ 1" Angle Stop - 10077t3

■ 1 1/2" Vacuum Breaker - 10075t1

■ Spud Nut & Escutcheon - 71051Nt6

■ Sweat Solder Kit - TH559EDVSJ3



*Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements for people with disabilities.*

TMT1HNC -32

### FLUSHOMETER VALVE

TOTO's superior quality manual flushometer valves incorporate a durable brass body with polished chrome finish, adjustable tailpiece, back-check angle stop with vandal-proof cap, vacuum breaker outlet tube, wall flange, fixture spud escutcheon and spud nut.

### SUPERIOR PISTON VALVE TECHNOLOGY

TOTO's piston valve technology is a marked improvement over traditional rubber diaphragm type valves. Not only does the longer piston travel and self-cleaning, stainless steel debris screen reduce common problems such as continuous running and flooding, but the piston itself will not warp or mis-seal, thus significantly reducing repair and maintenance costs.

### NEW STANDARD OF PERFORMANCE



A superior and unparalleled engineering design assures a consistently strong flushing action even under a wide range of pressures. The valve is easily adjusted to suit the needs of any manufacturer's fixture.



Reliance Commercial Line

# Manual Water Closet Flushometer Valve Exposed – 1.6 GPF & 3.5 GPF

## SPECIFICATIONS

<b>Product</b>	TMT1HNC - Valve Only, 1.6 GPF, Right/Left Hand Rough TMW1HNC - Valve Only, 3.5 GPF, Right/Left Hand Rough TMT1HNC-32 - Complete Set(1 1/2" V.B.), 1.6 GPF, Right/Left Hand Rough TMW1HNC-32 - Complete Set(1 1/2" V.B.), 3.5 GPF, Right/Left Hand Rough
<b>Fixture Type</b>	Flushometer bowl 1.6 or 3.5 GPF
<b>Water supply pipe</b>	1" NPT
<b>Water supply pressure</b>	15 psi - 100 psi
<b>Listings</b>	 City of Los Angeles  A.S.S.E. 1037
<b>Warranty</b>	Limited one (1) year warranty on all component parts. Details available upon request.

*These dimensions and specifications are subject to change without notice.*


## SUGGESTED ENGINEERING SPECIFICATION:

TOTO Model No. \_\_\_\_\_

Manual toilet flushometer valve, piston type with stainless steel, self-cleaning debris screen and precise flushing capability. Low consumption 1.6 GPF or water saving

3.5 GPF models available. Polished chrome exterior, angle stop with back-check and vacuum breaker included.

## DIAGRAM:

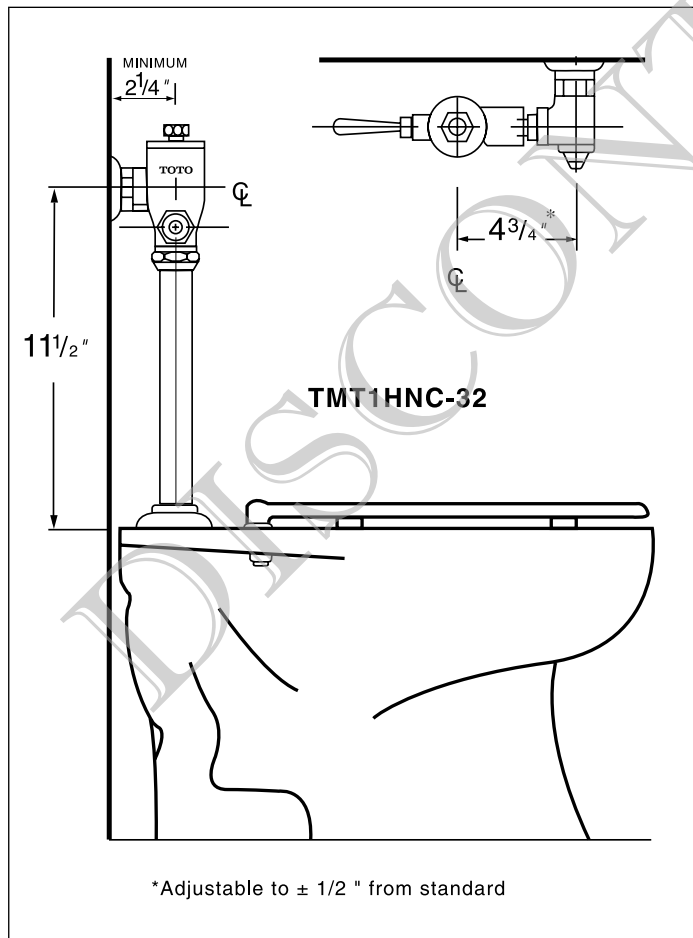

**FLUSHOMETER VALVES** - brass construction, polished chrome exterior, piston valve, angle stop with check valve, outlet tube with vacuum breaker, spud nut, escutcheon & wall flange.

- TMT1HNC -32** 1.6 gpf toilet F.V.  
1 in. NPT inlet and 1-1/2 inch outlet
- TMW1HNC-32** 3.5 gpf toilet F.V.  
1 in. NPT inlet and 1-1/2 inch outlet